



Vision Frameless Sliding Doors




Vision Frameless Sliding Doors

Our vision is simple. Vision. Being able to see exactly what you want: your view, not your window or door.

We specialise in installing frameless doors and windows in homes and commercial buildings across the UK.

We take glazing to a whole new level, by making it invisible. We are committed to product development of our systems to ensure we are always at the forefront of glazing technologies.

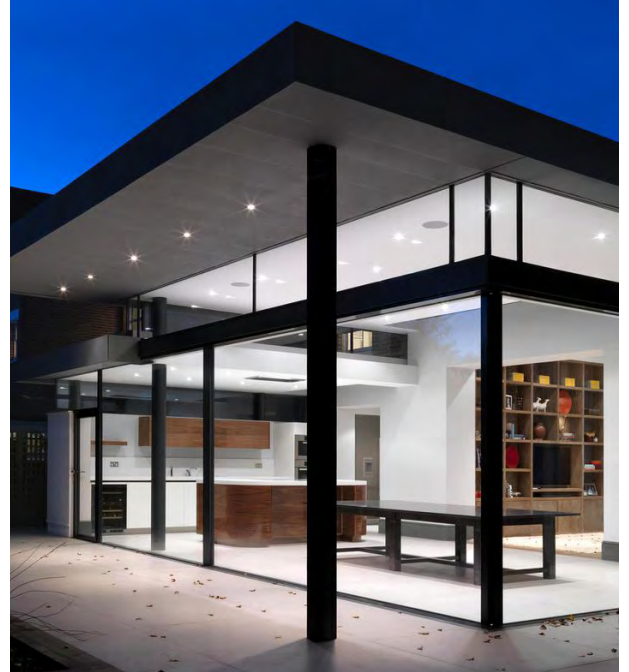

3





Our in-house CAD team can assist from planning to completion to ensure a smoothly run project.

With multiple configurations available – your imagination is the limit.


If we haven't done it, we will try and find a way to make your dreams possible.






Key Features

- Utilise the natural strength of aluminium to create slim thermally broken profiles
- Low maintenance hard wearing powder coated aluminium
- 20mm sight lines
- Multi point locking system
- U values from 1.3W/M²k
- Moving corner posts
- 4-6 week lead times
- Automated option
- Flush tracks and slot drainage available
- Available as sliding windows
- A variety of glazing options including solar control and easy clean
- Up to 4 track available giving you 80% opening

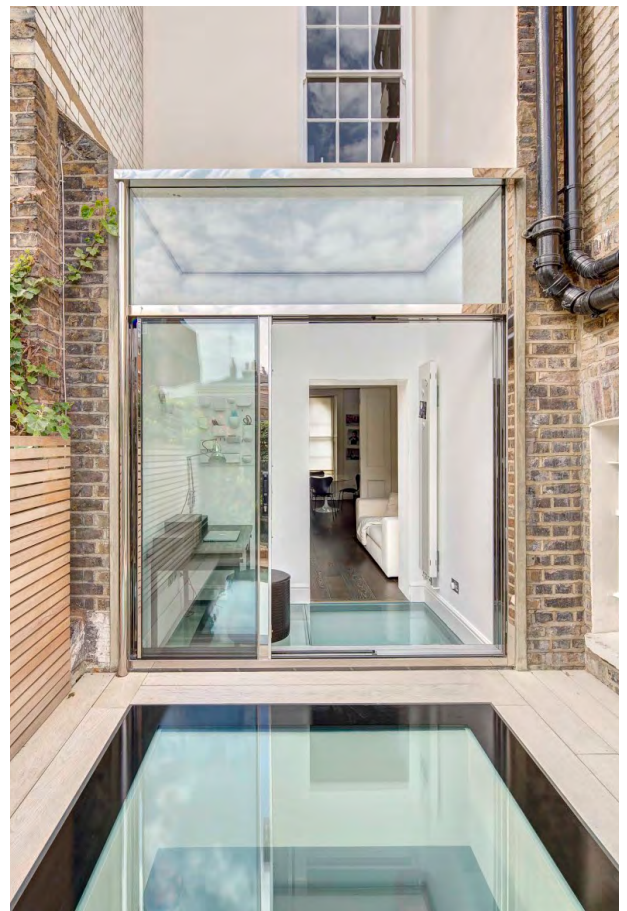

Configurations

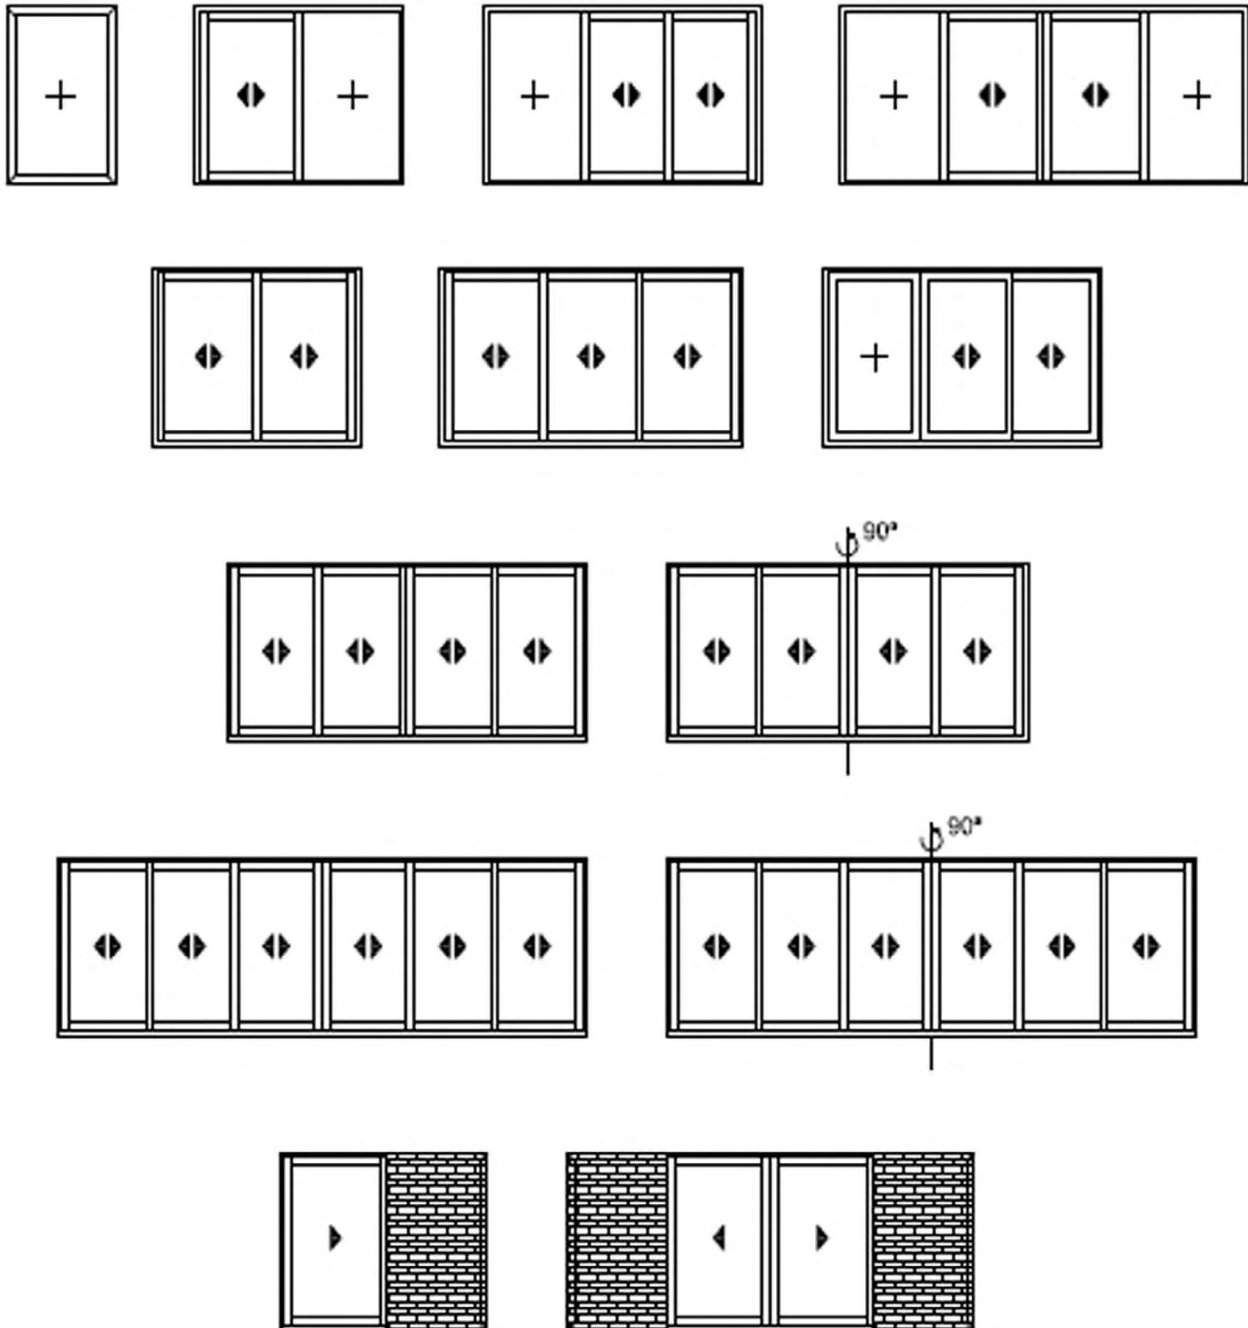

Specification Data

Applications	All general light applications.
Features	<p>Vision sliding doors incorporates frameless design with 20mm sightlines allowing for as much daylight as possible. Recessed tracks allow for as little interrupted views as possible.</p> <p>Highly efficient double glazed units with thermally broken aluminium allow for low U values.</p>
Colour	Aluminium able to be painted to any RAL, Syntha Pulvin and BS colours.

Performance

	While all calculations such as wind-loading, U-values, size and weight limitations are calculated on a project basis these are the average values for an average casement.	
U Values	1.3W/m ² K (Using a 1.1W/m ² K glass unit)	
	1.1W/m ² K (Using a 0.7W/m ² K glass unit)	
Wind Resistance	EN 12210:2000	Class C5
Water Tightness	EN 12208:2000	Class 7A
Air Permability	EN 12207:2000	Class 4
Document Q	Compliant	
Document L	Compliant	

Dimensions

Maximum Dimension	Each panel can go 3000mm high by 3000mm, please enquire if you would like to go outside these sizes.
Maximum Weights	500kg – enquire if you would like to go outside this weight.
Frame Depth	44mm
Glazing Thickness	28-32mm double glazed units – triple glazing available on request.

